



Travel time, O/D matrices, incident detection, Online web based applications, Cabinet w/solar

Bluetooth, Wi-Fi, GPS, 3G, Dual-SIM, Ethernet, Multi-color LED, GPIO, RTC Battery, Non-volatile memory

Field proven, easy set-up and configuration, multi-lane, side-fire, Wireless device detection, tracking

Cost effective, Low power, Self-diagnostics, Autonomous, Reliable and secure transmission

CABINET BLUETOOTH & VERSION V2t-PLATFORM

With our dedication to continuous development the specifications are subject to change. To verify the current information please visit www.deepbluesensor.com

DeepBlue V2t Sensor

POWER SUPPLY

12 to 48 VDC Min 1.93 W (configuration dependent)

CPU & MEMORY

ARM 9 Processor 128 MB RAM / Flash Micro SD storage

COMMUNICATIONS

Ethernet
Optional 3G/CDMA Worldwide
Remote Sensor Access
Optional General Purpose IO

OPERATIONS

Linux based OS LED for operations diagnostics

ENVIRONMENTAL

-35°C to +80°C

Shock/vibration: NEMA TS2-2003

CABINET DIMENSIONS & WEIGHT

H x W x L 400 mm x 300 mm x 200 mm 3.50 kg (excl. Battery and solar panel)

BLUETOOTH

Single or Dual channel operation
Detects all standard Bluetooth® versions
More than 500 meters range
Up to -104dB receive sensitivity

WI-FI


Optional Wi-Fi detection

REGULATORY

RoHS Compliant

CE, FCC certified



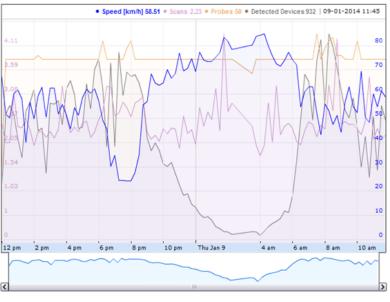



With our dedication to continuous development the specifications are subject to change. To verify the current inform